


Features:

- 1 With 36T/48T ratchet-function for controlled clockwise direction.
- 2 Adjustable tool in a wide torque range of applications.
- 3 Additional micrometer scale for setting interim value.
- 4 Tolerance of torque $\pm 6\%$.(1-5Nm, 2-10Nm)
- 5 Tolerance of torque $\pm 4\%$.(5-25Nm, 10-60Nm, 25-100Nm)
- 6 Quality meets DIN ISO 6789 & ASME B107.300-2010.



7 Unique continuous slipping mechanism eliminates the risk of over tightening.

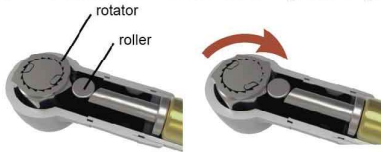


When the torque value is achieved, the mechanism slips through over the roller and automatic resetting.

8 Two torque units(N-m & lbf-ft) for easy scale reading through window.



9 Locking button enables reliable locking of the torque setting.



10 Easy torque adjusting design, ergonomically shaped and convenient plastic handle grip.



Specification:

Model No.	Square Drive (inch)	Teeth	Torque		Graduation	Overall Length		Net Weight		Ctn (Pcs)
			N-m	lbf-ft		mm	inch	kgs	lbs	
TW-162005NF	1/4	36T	1-5	0.7-3.7	0.05	260	10-1/4	0.52	1.15	24
TW-162010NF	1/4	36T	2-10	1.5-7.4	0.1	260	10-1/4	0.52	1.15	24
TW-162025NF	1/4	36T	5-25	3.5-18	0.1	320	12-3/5	0.59	1.30	24
TW-163025NF	3/8	36T	5-25	3.5-18	0.1	320	12-3/5	0.59	1.30	24
TW-163060NF	3/8	48T	10-60	8-44	0.25	355	14	0.655	1.44	24
TW-163100NF	3/8	48T	25-100	18-75	0.5	475	18-5/7	1.43	3.15	12
TW-164060NF	1/2	48T	10-60	8-44	0.25	355	14	0.655	1.44	24
TW-164100NF	1/2	48T	25-100	18-75	0.5	475	18-5/7	1.43	3.15	12

Model No.	Square Drive (inch)	Teeth	Torque		Graduation	Overall Length		Net Weight		Ctn (Pcs)
			lbf-ft(lbf-in)	N-m		mm	inch	kgs	lbs	
TW-162004FN	1/4	36T	10-45	1.5-5	0.5	260	10-1/4	0.52	1.15	24
TW-162009FN	1/4	36T	20-90	2.5-10	1	260	10-1/4	0.52	1.15	24
TW-162022FN	1/4	36T	50-220	6-25	1	320	12-3/5	0.59	1.30	24
TW-163022FN	3/8	36T	50-220	6-25	1	320	12-3/5	0.59	1.30	24
TW-163042FN	3/8	48T	8-42	10-56	2	355	14	0.655	1.44	24
TW-164042FN	1/2	48T	8-42	10-56	2	355	14	0.655	1.44	24

SUMAKE Industrial Co., Ltd.

4F, No.351, Yangguang St., Neihu District, Taipei, Taiwan, Zip:114-91

Tel: 886-2-2659-3500

Fax: 886-2-2659-3700

http://www.sumake.com

e-mail: sales@sumake.com.tw



Certificate TW04/02301

XPHT-W19-0717(R2)