

SUMAKE® Split-Beam Torque Wrench

MAKE JOBS BETTER THAN EVER



Features:

- 1 Tolerance of torque: horizontal $\pm 4\%$; flexed $\pm 4\% \sim \pm 10\%$.
- 2 Non torque-spring mechanism: don't need to reset after use, which brings longer tool life.
- 3 Toothed hinge cover contains the lock function, which can prevent setting from being changed.
- 4 Panel displayed N.m(ft-lb) on the handle.
- 5 TPR padded handle provides oil-resistance, comfort and easy control.
- 6 Strong feedback and loud click sound when reached the required torque.
- 7 Quality meets DIN ISO 6789 & ASME B107.300-2010.




8 Torque setting on window scale can be easily to read.



9 Open toothed hinge cover, adjust torque setting by knob.(PAT.)

10 Knob-type torque adjustment faster and more energy-efficient.





11 Flex head models provide 15° knuckle, which can be used to avoid obstacles.
(for TW-18 series)



(for TW-21 series)




Detachable head and wrench

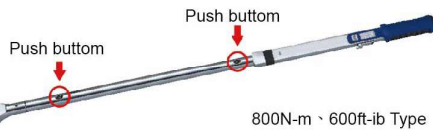

800N-m、600ft-lb Type

Non coil-spring mechanism

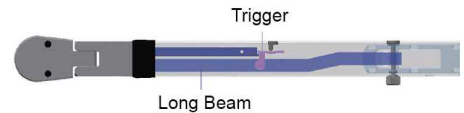

Long Beam

Specification:

Model No.	Square Drive (inch)	Teeth	Swing Arc	Torque (ft-lb)(in-lb)	Graduation	Overall Length		Net Weight		Ctn (Pcs)
						mm	inch	kgs	lbs	
TW-183051F	3/8	32T	15°	120-600	10	475	18-5/7	0.95	2.09	12
TW-183050F	3/8	32T	15°	10-50	1	475	18-5/7	0.95	2.09	12
TW-183100F	3/8	32T	15°	20-100	2	475	18-5/7	0.95	2.09	12
TW-184150F	1/2	32T	15°	30-150	5	590	23-2/9	1.705	3.76	10
TW-184250F	1/2	32T	15°	40-250	5	590	23-2/9	1.705	3.76	10
TW-216600F	3/4	24T	-	200-600	10	1265	49-4/5	5.45	12.02	2

Model No.	Square Drive (inch)	Teeth	Swing Arc	Torque (N-m)	Graduation	Overall Length		Net Weight		Ctn (Pcs)
						mm	inch	kgs	lbs	
TW-183068N	3/8	32T	15°	14-68	2	475	18-5/7	0.95	2.09	12
TW-183130N	3/8	32T	15°	25-130	5	475	18-5/7	0.95	2.09	12
TW-184200N	1/2	32T	15°	40-200	5	590	23-2/9	1.705	3.76	10
TW-184350N	1/2	32T	15°	70-350	5	590	23-2/9	1.705	3.76	10
TW-216800N	3/4	24T	-	270-800	10	1265	49-4/5	5.45	12.02	2

SUMAKE Industrial Co., Ltd.

4F, No.351, Yangguang St., Neihu District, Taipei, Taiwan, Zip:114-91

Tel: 886-2-2659-3500

Fax: 886-2-2659-3700

http://www.sumake.com

e-mail: sales@sumake.com.tw



Certificate TW04/02301

XPHT-W19-0702(R1)